

LED controller



P/N: RP-125W-4CH-24V



ColorRay

RAY POWER

► **FEATURES**

- Internal 24V / 6.3A switching power supply unit
- 125W(15pcs of COLOR RAY)
- DMX input and DMX output
- Multiple AC input voltage (selectable)

► **SPECIFICATION**



AC input :	90-120V, 50-60Hz / 220-240V, 50Hz
Data input :	DMX 512 of 3-pin XLR socket
Data Output :	DMX data out of 3-pin XLR socket
Power and Data Output :	DC24V and data out 4pcs of 5-pin XLR sockets
Housing:	Sheet metal with powder painting
Weight:	2.2Kg
Dimension:	300(L) x 155(W) x 75(H)mm

► **ACCESSORIES**

Part No.	Description
CBL-EXT-5P-1M	1 meter extension cable (IP65)
CBL-EXT-5P-3M	3 meter extension cable (IP65)
CBL-DIN-5P-2M	2 meter starter cable (IP65)
CBL-END-5P	End cap
CR-9W-RGB-16-BLK	ColorRay RGB 16°

► **PHYSICAL DIMENSIONS**

SYSTEM CONFIGURATION

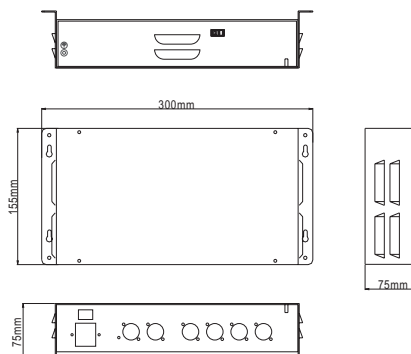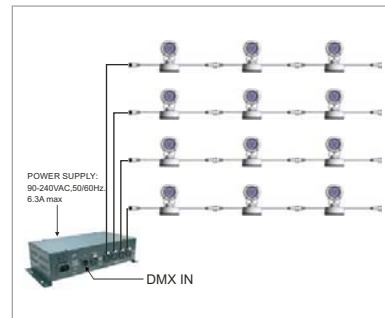

** All rights reserved. Improvement and changes to specifications, design and all contents in this catalog, may be made at any time without prior notice.